


At Antique  
**The Future**  
always starts  
Now!

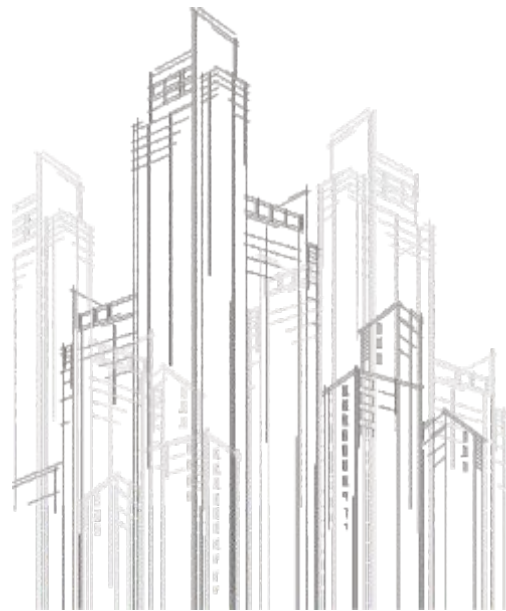

**antique**<sup>®</sup>

build better. build stronger.

An ISO 9001:2015 Company

**Antique Designer Tiles**

Plot no. 02, Rafaleshwer G.I.D.C,

8-A National Highway Rafaleshwer,

Morbi 363 642 Gujarat, INDIA

mail : [info@antiquegroup.in](mailto:info@antiquegroup.in)

website : [www.antiquegroup.in](http://www.antiquegroup.in)

**Toll Free : 1800 123 3220**

DISCLAIMER : The product information & application details given by the company & its agents has been provided in good faith & meant to serve only as a general guideline during usage. Users are advised to carry out tests & take trials to ensure on the suitability of products meeting their requirement prior to full scale usage of our products. Since the correct identification of the problems, quality of other materials used and the on-site workmanship are factors beyond our control, there are no expressed or implied guarantee / warranty as to the results obtained. The company does not assume any liability or consequential damage for unsatisfactory results, arising from the use of our products.



**antique**<sup>®</sup>

build better. build stronger.



# antique

build better. build stronger.

An ISO 9001:2015 Company

## ABOUT US

Antique construction chemical company is considered as one of the leading supplier of construction chemical products in India. ANTIQUE CONSTRUCTION CHEMICAL COMPANY is an ISO 9001-2015 certified company. Antique is fastest growing Indian company in the field of construction chemical with the brand name of Antique. Our product range of construction chemical such as epoxy and grout, adhesives, admixtures, sealers and other for various applications like grouting, fixing of tiles, waterproofing etc.

“

## VISION

“ To Create Everlasting Bonds With The People Through World Class Products & Services. ”

- Antique

”

## COMPANY STRATEGY

- Our world is nothing more than the extension of our personality - A signature that is individual and unique, an irreplaceable stamp of our soul.
- Our choice leads us and our taste defines us.
- Core values - we believe in treating our customers with respect and faith. We integrate honesty, integrity and business ethics into all aspects of our business functioning.
- **Mission** - To build long term relationships with our customers and provide exceptional customer services by pursuing business through innovation and advanced technology.
- Purpose to be a leader in constructions chemical industry by providing enhanced Product, services, relationship and profitability.

**BUILD BETTER**  
**BUILD STRONGER**

## ADHESIVES

- Copper Adhesive 03
- Silver Adhesive 05
- Golden Adhesive 07
- Platinum Adhesive 09
- Flexi-bond Adhesive 11
- Block Jointing 13

## GROUTS

- Tile Grout Silver 15
- Tile Grout Golden 17
- A- Poxy Grout 19
- Grout Admix 21

## WATER PROOFING

- Cem Bond AW+111 23
- SBR - Super Latex 555 25
- Antiseal 115 27
- New Coat 29
- Master Coat 550 31

## WALL AND FLOOR FINISHING

- Floor Coat 33

## TILE CARE

- Tile Cleaner 35

## ACCESSORIES

- Tile Spacer 37
- Adhesive Trowel
- Tile Leveling Kit



**BUILD BETTER**  
**BUILD STRONGER**



## Antique Set Plus Copper Adhesive

Tile Fixing Adhesive For Internal Wall & Floor  
Applications



Packing  
**20 kg**

### Product Details

Grey, high polymer modified, cement-based tile adhesive, suitable for fixing tiles & natural stones & Vitrified tiles in interior and exterior situations. applications in difficult and demanding situations consult Antique regarding use of a higher performance adhesive.

### Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

### Coverage

This will depend on the nature and lateness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.



**BUILD BETTER**  
**BUILD STRONGER**



## Antique Set Plus Silver Adhesive

Tile Fixing Adhesive For Internal Wall & Floor  
Applications



Packing  
**20 kg**

### Product Details

Grey, high polymer modified, cement-based tile adhesive, suitable for fixing tiles & natural stones & Vitrified tiles in interior and exterior situations. applications and more difficult and demanding situations consult Antique regarding use of higher performance adhesive.

### Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

### Coverage

This will depend on the nature and lateness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.



**BUILD BETTER**  
**BUILD STRONGER**



## Antique Set Plus Golden Adhesive

Tile Fixing Adhesive For Internal And External  
Wall & Floor Applications



Packing  
**20 kg**

### Product Details

Golden high polymer modified, cement-based wall and floor tile adhesive. Suitable for fixing tiles and natural stones in interior and exterior situations, including swimming pools. For Fixing Tile on Tile.

### Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

### Coverage

This will depend on the nature and lateness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.



**BUILD BETTER**  
**BUILD STRONGER**



## Antique Set Plus Platinum Adhesive

Tile Fixing Adhesive For Internal And External  
Wall & Floor Applications



Packing  
**20 kg**

### Product Details

Platinum White is a premium, water & frost resistant, highly polymer modified cementitious wall and floor tile adhesive specially formulated for fixing mosaic tiles ceramic, glass mosaic. it is also suitable for fixing ceramic, vitrified wall and floor tiles, metal or glass tiles, marble, granite, Quartz Stone, terrazzo and other natural stone in interior and exterior locations. Suitable for use in swimming pools. For Fixing Tile on Tile & Stone.

### Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

### Coverage

This will depend on the nature and letness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.



**BUILD BETTER**  
**BUILD STRONGER**



## Antique Set Plus Flexibond Adhesive (2 packs)

Tile Fixing Adhesive For Internal Wall & Floor  
Applications



**Packing**  
**10kg** Powder &  
**5 Kg** Liquid  
WHITE And GREY Colors.

### Product Details

White two-part adhesive comprising of rubber-based powder and water-based liquid. Flexible adhesive for use in areas where tiling is likely to be subjected to some limited background movement or vibration, especially wood and plywood.

### Performance

Suitable for fixing at 2-6mm thickness (up to 12mm thickness in areas of limited extent):- Suitable for fixing ceramic wall tiles, ceramic also floor tiles in interior and exterior installation including swimming pools. Also suitable for use on floors traffic should be allowed on the floor for at least 4 days after completion of tiling. With dense or impervious surfaces, drying-out and setting time of the adhesive may be delayed. The set adhesive is water-resistant but is not impervious to water.

### Performance

Surface to be tiled must be dry, clean, and free from all contamination. Suitable surface include:

### Mixing

Mix together FLEX Liquid with Antique Flexi Bond Powder in the proportions supplied i.e. 5 liters of liquid to 10kg of powder.

### Coverage

(Depends on the nature and flatness of the surface and the method of application, but at 3mm thickness it is approximately 6m<sup>2</sup> per 10kg powder and 5 liter liquid when using notched trowel and 4m<sup>2</sup> per 10kg powder and 5 liter liquid when using a solid-bed trowel. For good coverage, it is vitally important that all surface should be clean, smooth, plumb, level and free from defects and undulations.)





**BUILD BETTER**  
**BUILD STRONGER**



## Antique Set Plus Block Jointing Adhesive



Packing  
**20 kg**

### Product Details

It is a factory prepared blend of carefully selected raw materials, Portland cement and graded aggregates and polymers. Designed for use with water to produce high strength thixotropic mortar, for laying aerated light weight concrete, fly ash bricks, cement hollow blocks, cellular concrete blocks or smoothing over the block work surface in layers of up to 12mm thickness, that meet and exceed the requirements of National and International Standards.

### Applications

For interior and exterior use for preparing thin bed block mortar for ALC and cellular concrete blocks

### Advantages

- \* Long working time
- \* No curing required after block work is done
- \* Improved adhesion between two blocks
- \* Fast & economical

### Coverage

Approximately 300 sq.ft. per 50 kg bag when used at 2mm bed thickness. Coverage is based on smoothness and evenness of the substrate, size of blocks used and the thickness of mortar used. A general guideline for coverage of mortar is given when used with 25% water added to powder.

Note : Coverage is based on the block size of 600mm\* 200mm\* 100mm



**BUILD BETTER**  
**BUILD STRONGER**



# Antique Tile Grout ( TG Silver )

One Pack Water Resistant Tile Grout



**Packing**  
**500gm, 1kg**

### Product Details

A high quality fine, polymer modified, water-resistant, cement - based powder grout designed for grouting glaze wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles, etc (where chemical resistance hygienic and sterile is important use EPOXY GROUT)


### Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

### Coverage

This will depend on the nature and lateness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.

### Colours

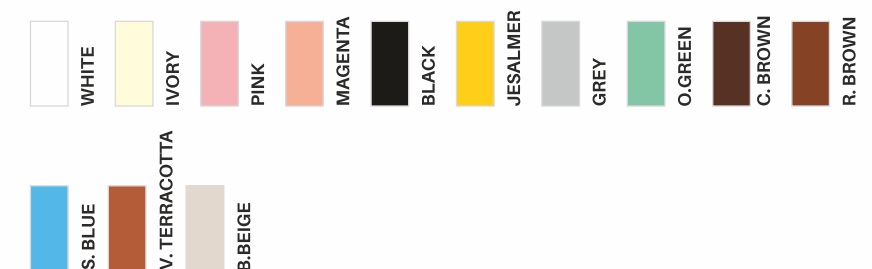



**BUILD BETTER**  
**BUILD STRONGER**



## Antique Tile Grout Golden (High Polymer)

One Pack Water Resistant Tile Grout and Mild Acid Proof



Packing  
**1 kg**

### Product Details

A high quality fine, high-polymer modified, high performance GOLDEN GROUT with excellent water-resistance and efflorescence resistance designed for grouting glazed tiles / mosaics, vitrified and fully vitrified tiles, ceramic tiles, industrial tiles, granites, marbles & other natural stones etc. GOLDEN GROUT has higher strength, water and stain resistant compared to normal cement Grout.

### Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

### Colours





**BUILD BETTER**  
**BUILD STRONGER**



# Antique Epoxy Grout A- Poxxy Grout AP - 100

Stain Proof Grout For Floor & Wall (3 Part)



**Packing**  
**1kg, 5kg,**

## Product Details

Hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. the cured grout does not transfer taints to foodstuffs, does not permit the entry of bacteria or dirt and is easily maintained in a sterile condition.

## Technical Specification

JOINT WIDTH	POT LIFE @ 27 + 2C°	CURE @ 27 + 2C°	TEMPERATURE RESISTANCE	WATER ABSORPTION	SPECIFIC GRAVITY
2-20mm	45 minutes	48hours	Prolonged - 30°C To 150° c intermittent up to 100 c°	Nil (1)	1.75
TENSILE ADHESION (14 DAY AIR)					
			Dry Condition		Wet Condition
Epoxy Grout			>4.5Kn		>3.6Kn
BS 5980 : 1980			0.95		0.56
(2)					

### Packaging Sparkle

Kit:	Filler	Resin	Hardener
5 kg :	3.300 kg	1.225 kg	0.475 kg
1 kg :	0.660 kg	0.245 kg	0.095 kg

### Packaging Marvel

Kit:	Filler	Resin	Hardener
5 kg :	3.750 kg	0.900 kg	0.350 kg
1 kg :	0.750 kg	0.180 kg	0.070 kg



**BUILD BETTER**  
**BUILD STRONGER**



## Antique Grout Admix



**Packing**  
**200 ml,**  
**400 ml,**

### Product Details

Grout Admix is specially designed Latex Admix to be used with Sanded & Unsanded Grout.

### Applications

It improves the performance of Portland cement grouts for all type of ceramic tile, brick, marble, natural stone and agglomerate stone installations.

### Benefits

- \* Colour-fastness
- \* Flexibility
- \* Compressive strength
- \* Shock and chemical resistance
- \* Reduces water absorption
- \* Easy to clean

### Coverage

Varies by application



**BUILD BETTER**  
**BUILD STRONGER**



# Antique Cem Bond AW+111

**INTEGRAL LIQUID WATER PROOFING COMPOUND FOR CONCRETE & PLASTER (Add Mixture)**



**Packing**  
**200 ml, 1, 5,**  
**20 & 220 liter**

## Product Details

Antique Cem Bond is specially formulated integral liquid waterproofing compound composed of surface active Plasticising agents, polymers & additives. It is used as an additive for cement concrete, mortar & plasters. It makes concrete cohesive and prevents segregation.

## Areas of Application Waterproofing of concrete and sand-cement mortars used in

- \* Basements
- \* Roof slabs and screeds
- \* Water tanks & water retaining structures
- \* External plastering
- \* Bathrooms and balconies
- \* Sumps and drains

## Method of Application

- \* Charge cement & aggregates to concrete mixer as per the mix design, mix in dry state for 1-2 minutes.
- \* Start addition of 75-80% mixing water & mix for 2-3 minutes.
- \* Antique Cem Bond /Super Bond is added as per the recommended dosage into the remaining mixing / gauging water, then add to concrete mixer & mix for another 2 minutes.
- \* Place the concrete or apply plaster, as needed .
- \* Cure the applied mortar or concrete as per good construction practices.

## Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

## Dosage

100 to 300 ml per 50 kg bag of cement



**BUILD BETTER**  
**BUILD STRONGER**



# Antique Super Latex 555 (SBR)

SBR Latex for Waterproofing & Repairs



**Packing**  
**250 g, 1 kg,**  
**5 kg & 20 Kg**

### Product Details

Antique Super Latex - 555 SBR is a highly potent and versatile SBR based liquid for high performance applications in waterproofing and repairs.

### Technical Information

- Type - Styrene Butadiene Polymer Liquid
- Color - White
- Specific Gravity - 1.02 + 0.02
- Storage Condition - Free from frost
- Solid Content - 44 + 1%
- For best result - use before 1 year if unopened Consumption - 1 kg of super latex will cover 70 - 80 sq. ft. area in 2 coats for a proportion mix 1:4:7 ( Super Latex : Water : Cement)



**BUILD BETTER**  
**BUILD STRONGER**



## Antique AntiSeal 115

Single Component Polymer Modified Waterproof Coating



Packing  
1 kg

### Product Details

**Antique Seal - 115** is composed of viscous, polymer modified, mineral fillers, additives and water as a medium. It is used as a waterproof & weather proof membrane for concealed roofs, walls of the building structures because it forms relatively thick film and bonds firmly to cementitious surfaces, protects wood & timber and prevents rust formation. Waterproofing is achieved by applying Antique Seal - 115 by brush or mop.

### Areas of Application

Waterproofing of concealed roofs, wall, water tank, swimming pool,  
\*Corrosion protection for concrete from sea water.

### Application

- \* Apply Three coats directly by brush or mop and dilute **Antique Seal - 115** with three part of water & one part of **Antique Seal - 115** powder.
- \* Apply 2nd & 3rd coat in gapes of two or three hours.

### Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place. Keep away from direct sun light.

### Coverage

- \*1kg material gives coverage 10 to 15 sq. ft.(Three coats)
- \* Coverage may vary depending upon the texture and porosity of the surface





**BUILD BETTER**  
**BUILD STRONGER**



## Antique New Coat

Heavy Duty Reinforced Acrylic Water Proof Coating  
For Terrace



**Packing**  
**1,5 and 20kg**

### Product Details

Antique New coat is a heavy duty terrace waterproof coating system, composed of specially developed highly elastic & resilient acrylic polymers, properly selected & graded fillers, lightfast & weather durable pigments, micro-fibres, additives & best quality as well.

Antique New coat is a three-layer system with coats in different colours ensuring proper build-up of the thickness, making it a reliable waterproofing system. The coating performance can be enhanced for large roofs, by providing a fibre mesh that is embedded or sandwiched between the coats.

### Areas of Application

- \* Building roofs / Terraces- Flat & sloping.
- \* Over existing cementitious waterproofing treatments like brickbat coba, concrete screeds, acrylic coatings, etc.

### Application

- \* Apply the first coat of Antique New coat without any dilution at the rate of 2m<sup>2</sup> per litre and allow it to dry before taking up the second and third coats, the rate of application being the same
- \* Drying time between coats will be 6 to 8 hrs.

### Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place. Keep away from direct sun light.



**BUILD BETTER**  
**BUILD STRONGER**



# Antique Master Coat 550

Acrylic Reinforced Cementitious, Flexible Waterproof Coating



**Packing**  
**10kg** Powder &  
**5 Kg** Liquid  
WHITE And GREY Colors.

## Product Details

**Master Coat 550** is a two component acrylic modified cementitious system that requires only on site mixing forming the ideal coating to waterproof and resurface concrete, masonry, and most other construction materials. Simply applied by stiff brush, roller, or trowel, it forms a waterproof flexible coating.

## Uses

- \* As a waterproof lining for water retaining structures.
- \* As a waterproof coating for roofs.
- \* To provide foundation protection.
- \* For coating seawater channels.
- \* To provide protection to concrete surfaces from carbonation and chloride attack.
- \* Sealing and coating tie bar holes to ensure water tightness.
- \* For waterproofing and protection against brackish water.
- \* As a backing to marble and granite to prevent water ingress and thus eliminates surface staining.

**Master Coat** can be spray applied but should afterwards be brushed well into the substrate to ensure proper adhesion. To avoid this apply first coat by brush and second by spray application. Finally finish with sponge to get a uniform aesthetic appearance.

## Coverage

Each square meter will require minimum of 0.9 Kg of mixed material per layer. The coverage rate for each layer will be strongly influenced by the roughness of the substrate. 1.8 kg / ml in two coats to achieve 1 mm thickness.



**BUILD BETTER**  
**BUILD STRONGER**



## Antique Floor Coat (Floor Hardener)



**Packing**  
**20 kg bag**

### Product Details

**Antique Floor Coat** is composed of best Quality ordinary Portland cement, properly selected & graded washed & dried aggregates, polymer & additives. It is used as a concrete floor hardener for residential, commercial & industrial floors, because it forms a very high abrasion resistance to fresh concrete floor as a monolithic surface. It improves the strength & impact resistance of concrete floor to allow heavy duty movements.

### Benefits

- \* Base of application - Pre-mixed powder, easy to dry shake & trowel.
- \* Strength - Excellent compressive strength increases wear resistance of concrete floors.
- \* Abrasion & impact resistance - high abrasion & impact resistance provides erosion resistance due to movements of vehicular traffic. Develops 80% more abrasion resistance than control concrete.
- \* Water absorption - Very low water absorption because it forms dense & low permeability substrate.

### Coverage

Light duty application 2 kg/m<sup>2</sup>, medium duty application 3-5 kg/m<sup>2</sup>, heavy duty application 7 kg/m<sup>2</sup>

### Areas of Application

- \* Heavy industry
- \* Power stations
- \* Agricultural buildings & yards
- \* Desalination plants
- \* Distillation plants
- \* Laboratories
- \* Abattoirs
- \* Warehouse floors, loading bays and workshops
- \* Steel industries
- \* Railway platforms



**BUILD BETTER**  
**BUILD STRONGER**



# Antique Tiles Cleaner

Tile Care - Cleaners



Packing  
**0.500ml**

## Product Details

A powerful, heavy duty, acid-based cleaner for ceramic & vitrified tile - wall & floor. The cleaner can be used as general purpose cleaner on other acid resistant surface.

## Benefits

- \*Powerful formula
- \* Fast acting
- \* Easy to apply
- \* Removes cement film
- \* Remove efflorescence and most oxide stains

## Areas of Application


Interior & Exterior  
Wall & Floor

## Note

Do not use on surface that are not resistant to acid such as Natural stones, Terrazzo and CP Fittings.

**BUILD BETTER**  
**BUILD STRONGER**

Spacer are available in 2, 3, 4, 5, 6, 8, and 10mm

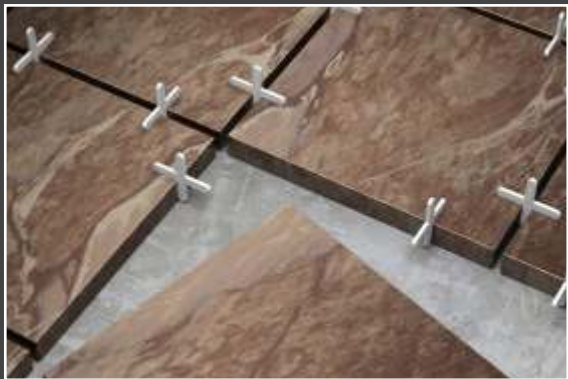

SPACER



TROWEL



TILE LEVELING KIT

Note :

A large white area with a faint grey outline of a floor plan and horizontal dashed lines for writing notes.

**Note :**

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----

-----



**antique**  
build better. build stronger.