

At Antique
the future
always starts
now!



Antique[®]
An ISO 9001:2008 Company
www.antiquegroup.in

Antique Designer Tiles
Rafaleshwer GIDC, Rafaleshwer, Gujarat, India
mail : antiquedesignertiles@gmail.com
Customer care no. :- +91-98795 70220

DISCLAIMER : The product information & application details given by the company & its agents has been provided in good faith & meant to serve only as a general guideline during usage. Users are advised to carry out tests & take trials to ensure on the suitability of products meeting their requirement prior to full scale usage of our products. Since the correct identification of the problems, quality of other materials used and the on-site workmanship are factors beyond our control, there are no expressed or implied guarantee / warranty as to the results obtained. The company does not assume any liability or consequential damage for unsatisfactory results, arising from the use of our products.



Built Better... Built Stronger...
AN ISO 9001 : 2008 CERTIFIED COMPANY

Product Catalogue

Water Proofing Product

Cleaning Product

Grouting Product

Wall Coating Product

Repair Product

Adhesive Product

An Architecture's Choice

Antique[®]
An ISO 9001:2008 Company

"Goal can be Completed, When they are Targeted"
Mr. Ganesh Fefar



Antique construction chemical company is considered as one of the leading supplier of construction chemical products in India.
ANTIQUÉ CONSTRUCTION CHEMICAL COMPANY is an ISO 9001-2008 certified company. Antique is fastest growing Indian company in the field of construction chemical with the brand name of **Antique**. Our product range of construction chemical such as epoxy and grout, adhesives, admixtures, sealers and other for various applications like grouting, fixing of tiles ,waterproofing etc.

Company Strategy

- Purpose To be a leader in constructions chemical industry by providing enhanced Product, services, relationship and profitability.
- Vision To provide quality Products & services that exceeds the expectations of our customers.
- Mission statement To build long term relationships with our customers and provide exceptional customer services by pursuing business through innovation and advanced technology.
- Core values We believe in treating our customers with respect and faith. We integrate honesty, integrity and business ethics into all aspects of our business functioning.

Our choice leads us and our taste defines us.
Our world is nothing more than the extension of our personality – A signature that is individual and unique, an irreplaceable stamp of our soul.



About us

CONTENTS



Built Better... Built Stronger...
AN ISO 9001 : 2008 CERTIFIED COMPANY

ADHESIVES

- Antique Copper Adhesive
- Antique Silver Adhesive
- Antique Golden Adhesive
- Antique Platinum Adhesive

GROUTS

- Antique TG Silver
- Antique TG Golden
- Antique Epoxy
- Antique Solid Epoxy

WATER PROOFING

- Antique Cem Bond
- Antique SBR
- Antique Seal
- Antique New Coat
- Antique Master Coat
- Antique Water Guard

WALL AND FLOOR FINISHING


- Antique Base mortar
- Antique Self Leveling Mortar
- Antique Floor Coat

TILE CARE

- Antique Tile Cleaner
- Antique Grout Protector
- Antique Grout Hardner

ACCESSORIES

- Antique Tile Spacer
- Antique Adhesive Trowel
- Antique Tile Leveling Kit

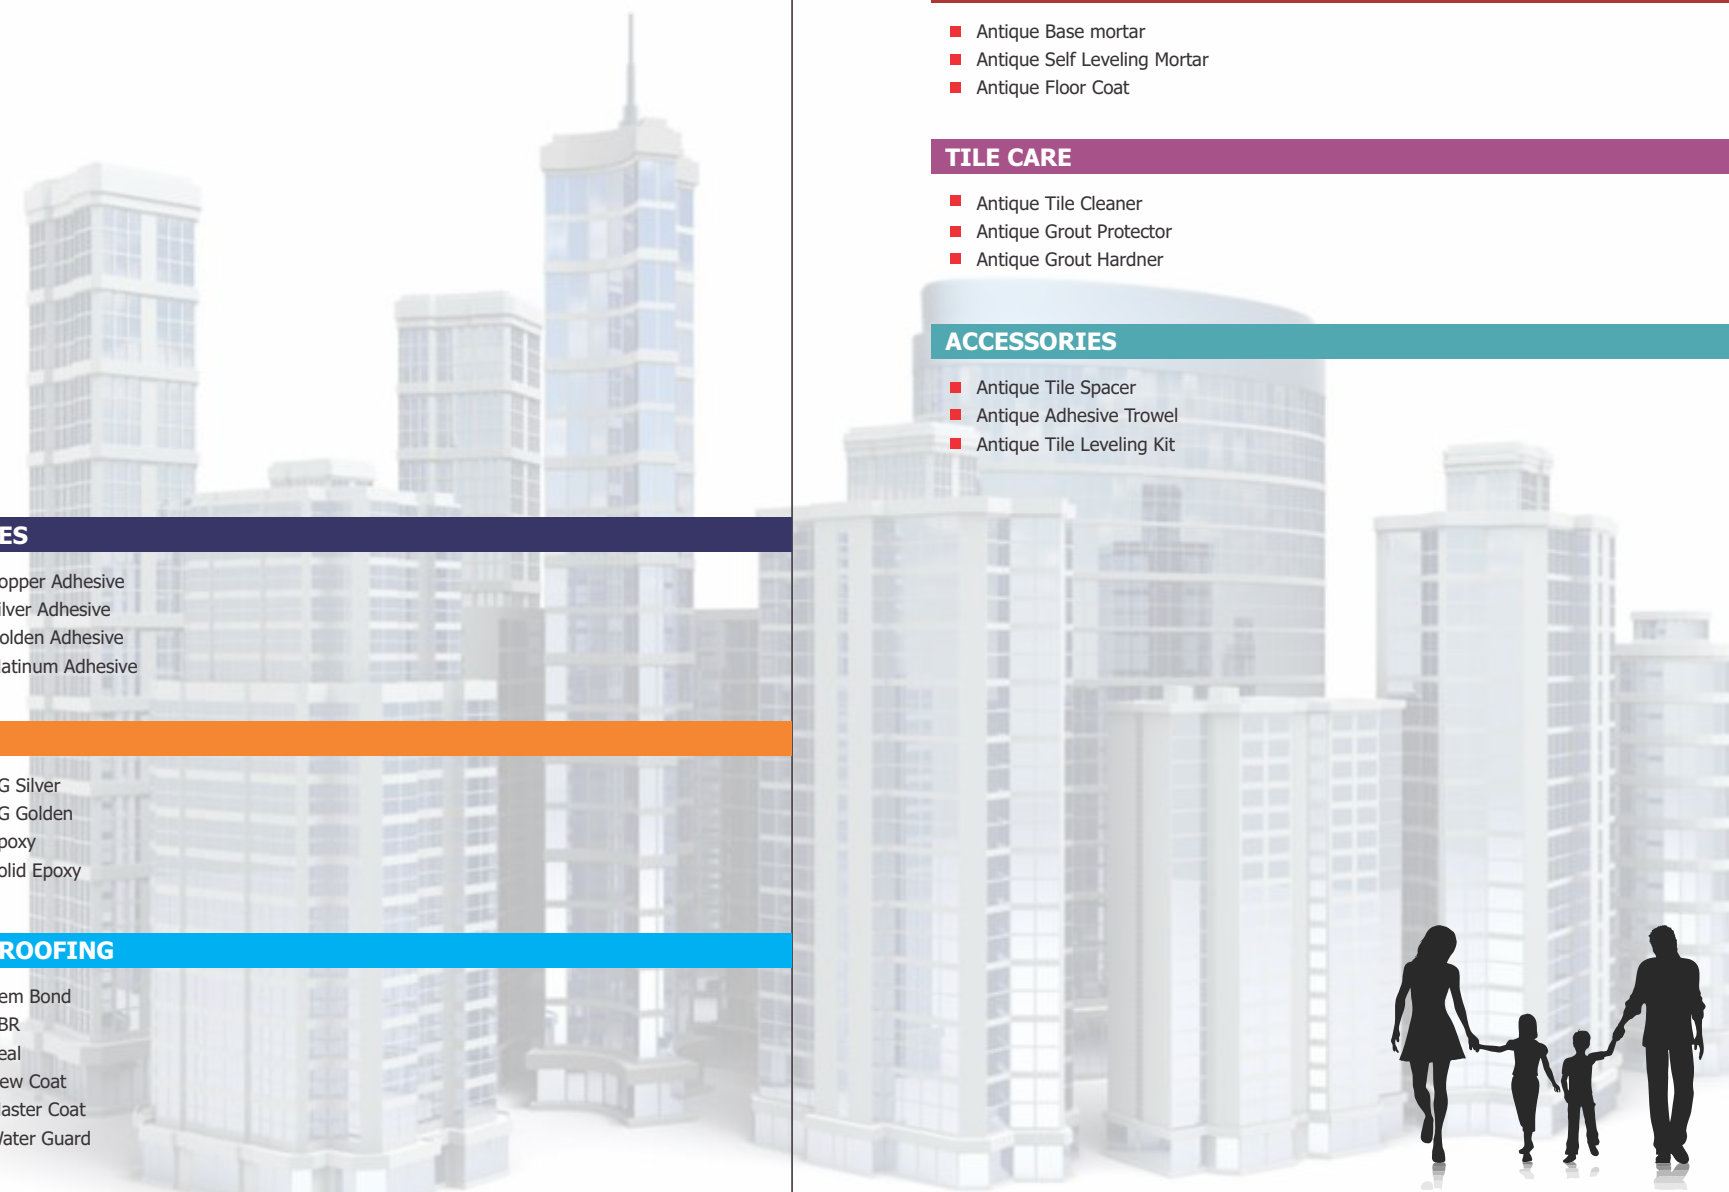



ADHESIVE



Antique Set Plus Copper Adhesive (Grey)

TILE FIXING ADHESIVE FOR INTERNAL WALL & FLOOR APPLICATIONS

PRODUCT DETAILS

Grey, high polymer modified, cement-based tile adhesive, suitable for fixing tiles & natural stones in interior situations. applications and more difficult and demanding situations consult Antique regarding use of a higher performance adhesive.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and flatness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.



PACKAGING

20 kg

ADHESIVE



Antique Set Plus Silver Adhesive (Grey)

TILE FIXING ADHESIVE FOR INTERNAL AND EXTERNAL WALL & FLOOR APPLICATIONS

PRODUCT DETAILS

Grey, high polymer modified, cement-based tile adhesive, suitable for fixing tiles & natural stones & Vitrified tiles in interior and exterior situations. applications and more difficult and demanding situations consult Antique regarding use of a higher performance adhesive.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and flatness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.



PACKAGING

20 kg



ADHESIVE



Antique Set Plus Golden Adhesive (White)

TILE FIXING ADHESIVE FOR INTERNAL AND EXTERNAL WALL & FLOOR APPLICATIONS

PRODUCT DETAILS

Golden White, high polymer modified, cement-based wall and floor tile adhesive. Suitable for fixing tiles and natural stones in interior and exterior situations, including swimming pools. For Fixing Tile on Tile.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and flatness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.



PACKAGING

20 kg

ADHESIVE



Antique Set Plus Platinum Adhesive (White)

TILE FIXING ADHESIVE FOR INTERNAL AND EXTERNAL WALL & FLOOR APPLICATIONS

PRODUCT DETAILS

Platinum White is a premium, water & frost resistant, highly polymer modified cementitious wall and floor tile adhesive specially formulated for fixing mosaic tiles ceramic, glass mosaic. it is also suitable for fixing ceramic, vitrified wall and floor tiles, metal or glass tiles, marble, granite, Quartz Stone, terrazzo and other natural stone in interior and exterior locations. Suitable for use in swimming pools. For Fixing Tile on Tile & Stone.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and flatness of the surface and the method of application, but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is vitally important that all surfaces should be clean, smooth, plumb, level and free from defects and undulations.



PACKAGING

20 kg



GROUTS



Antique Tile Grout Silver

ONE PACK WATER RESISTANT TILE GROUT

PRODUCT DETAILS

A high quality fine, polymer modified, water-resistant, cement - based powder grout designed for grouting glaze wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles, etc (where chemical resistance hygienic and sterile is important use EPOXY GROUT)

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.



COLOURS



PACKAGING

500gm, 1kg

GROUTS



Antique Tile Grout Golden (High Polymer)

ONE PACK WATER RESISTANT TILE GROUT AND MILD ACID PROOF

PRODUCT DETAILS

A high quality fine, high-polymer modified, high performance GOLDEN GROUT with excellent water-resistance and efflorescence resistance designed for grouting glazed tiles / mosaics, vitrified and fully vitrified tiles, ceramic tiles, industrial tiles, granites, marbles & other natural stones etc. GOLDEN GROUT has higher strength, water and stain resistant compared to normal cement Grout.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COLOURS



PACKAGING

1 kg



GROUTS



Antique Epoxy Grout

STAIN PROOF GROUT FOR FLOOR AND WALL 3 PART

PRODUCT DETAILS

Hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs, does not permit the entry of bacteria or dirt and is easily maintained in a sterile condition.

TECHNICAL SPECIFICATION

JOINT WIDTH	POT LIFE @ 27 ± 2°C	CURE @ 27 ± 2°C	TEMPERATURE RESISTANCE	WATER ABSORPTION	SPECIFIC GRAVITY
2 - 20mm	45 minutes	48hours	prolonged-30°C To 150°C intermittent up to 100°C	Nil (1)	1.75
TENSILE ADHESION (14 DAY AIR)					
			Dry Condition	Wet Condition	
Epoxy Grout			>4.5 kN	>3.6 kN	
BS 5980:1980 minimum			0.95	0.56	
(2)					

(1) Determined by the Campden & Chorleywood Food & Drink Research Association, UK
 (2) Exceeds the requirements of BS 5980 : 1980

PACKAGING SPARKLE

1kg, 5kg

Kit :	Filler	Resin	Hardener
5 kg :	3.300 kg	1.225 kg	0.475 kg
1 kg :	0.660 kg	0.245 kg	0.095 kg

PACKAGING MARVEL

1kg, 5kg

Kit :	Filler	Resin	Hardener
5 kg :	3.750 kg	0.900 kg	0.350 kg
1 kg :	0.750 kg	0.180 kg	0.070 kg



GROUTS



Antique High Gloss Epoxy Grout

100% SOLID EPOXY GROUT FOR FLOOR GLOSSY TILES

PRODUCT DETAILS

- * Stain & Chemical Resistant .
- * Easy to Spread & Clean .
- * For use in Floor Only not for grouting in wall .
- * Not for use in matt tiles & Stone .
- * fast drying formula .
- * Long working time / Easy to use
- * Use the material the pot life expiry period.
- * Mix entire pack quantity.
- * Do not dilute the material with solvent to reduce the viscosity.

Kit :	Resin	Hardener
0.250 kg	0.175kg	0.075 kg
1 kg	0.700 kg	0.300 kg

PACKAGING

1 kg, 0.250kg





WATER PROOFING



Antique Cem Bond / Super Bond

INTEGRAL LIQUID WATER PROOFING COMPOUND FOR CONCRETE & PLASTER (Add Mixture)

PRODUCT DETAILS

Antique Cem Bond /Super Bond is specially formulated integral liquid waterproofing compound composed of surface active Plasticising agents, polymers & additives. It is used as an additive for cement concrete, mortar & plasters. It makes concrete cohesive and prevents segregation.

Areas of Application Waterproofing of concrete and sand-cement mortars used in

- * Basements
- * Roof slabs and screeds
- * Water tanks & water retaining structures
- * External plastering
- * Bathrooms and balconies
- * Sumps and drains

Method of Application

- * Charge cement & aggregates to concrete mixer as per the mix design, mix in dry state for 1-2 minutes.
- * Start addition of 75-80% mixing water & mix for 2-3 minutes.
- * **Antique Cem Bond /Super Bond** is added as per the recommended dosage into the remaining mixing / gauging water, then add to concrete mixer & mix for another 2 minutes.
- * Place the concrete or apply plaster, as needed .
- * Cure the applied mortar or concrete as per good construction practices.

Dosage

100 to 300ml per 50 kg bag of cement

Packing

200 ml, 1, 5, 20 & 200 liter

Shelf Life & Storage

- * Shelf life is 12 months from the date of manufacturing in unopened conditions.
- * Store in a cool & dry place.



15

WATER PROOFING



Antique Super Latex - 555 - SBR

SBR LATEX FOR WATERPROOFING & REPAIRS

Antique Super Latex - 555 SBR is a highly potent and versatile SBR based liquid for high performance applications in waterproofing and repairs.

TECHNICAL INFORMATION:

- Type - Styrene Butadiene Polymer Liquid
 - Color - White
 - Specific Gravity - 1.02 + 0.02
 - Storage Condition - Free from frost
 - Solid Content - 44 + 1%
 - For best result - use before 1 year if unopened
- Consumption - 1 kg of super latex will cover 70 - 80 sq. ft. area in 2 coats for a proportion mix 1:4:7 (Super Latex : Water : Cement)

PACKING :

250 g, 1 kg, 5 kg & 20 Kg



16



WATER PROOFING



Antique Seal - 115

SINGLE COMPONENT POLYMER MODIFIED WATERPROOF COATING

PRODUCT DETAILS

Antique Seal - 115 is composed of viscous, polymer modified, mineral fillers, additives and water as a medium. It is used as a waterproof & weatherproof membrane for concealed roofs, walls of the building structures because it forms relatively thick film and bonds firmly to cementitious surfaces, protects wood & timber and prevents rust formation. Waterproofing is achieved by applying **Antique Seal - 115** by brush or mop. It forms joint less and seamless membrane.

Areas of Application

Waterproofing of concealed roofs, wall, water tank, swimming pool,
*Corrosion protection for concrete from sea water.

APPLICATION

- * Apply Three coats directly by brush or mop and dilute **Antique Seal - 115** with three part of water & one part of **Antique Seal - 115** powder.
- * Apply 2nd & 3rd coat in gapes of two or three hours.

Coverage

- *1kg material gives coverage 10 to 15 sq. ft.(Three coats)
- *Coverage may vary depending upon the texture and porosity of the surface

Packaging

1kg

Shelf Life & Storage

- * Shelf life is 12 months from the date of manufacturing.
- * Store in a cool & dry place. Keep away from direct sun light



17

WATER PROOFING



Antique New Coat

HEAVY DUTY REINFORCED ACRYLIC WATER PROOF COATING FOR TERRACE

PRODUCT DETAILS

Antique New coat is a heavy duty terrace waterproof coating system, composed of specially developed highly elastic & resilient acrylic polymers, properly selected & graded fillers, lightfast & weather durable pigments, micro-fibres, additives & best quality fungicidal in **Antique New coat** is a three-layer system with coats in **Antique New coat** is a three-layer system with coats in different colours ensuring proper build-up of the thickness, making it a reliable waterproofing system. The coating performance can be enhanced for large roofs, by providing a fibre mesh that is embedded or sandwiched between the coats.

Areas of Application

- Building roofs / Terraces- Flat & sloping.
- Over existing cementitious waterproofing treatments like brickbat coba, concrete screeds, acrylic coatings, etc.

Application

- Apply the first coat of **Antique New coat** without any dilution at the rate of 2m² per litre and allow it to dry before taking up the second and third coats, the rate of application being the same.
- Drying time between coats will be 6 to 8 hrs.

Packaging

1,5 and 20kg

Shelf Life & Storage

- * Shelf life is 12 months from the date of manufacturing.
- * Store in a cool & dry place. Keep away from direct sun light



18



WATER PROOFING



Antique Master Coat-550

ACRYLIC REINFORCED CEMENTITIOUS, FLEXIBLE WATERPROOF COATING

PRODUCT DETAILS

Antique Master Coat-550 is a two component acrylic modified cementitious system that requires only on site mixing forming the ideal coating to waterproof and resurface concrete, masonry, and most other construction materials.

Simply applied by stiff brush, roller, or trowel, it forms a waterproof, flexible coating.

Uses

- * As a waterproof lining for water retaining structures.
- * As a waterproof coating for roofs.
- * To provide foundation protection.
- * For coating seawater channels.
- * To provide protection to concrete surfaces from carbonation and chloride attack.
- * Sealing and coating tie bar holes to ensure water tightness.
- * For waterproofing and protection against brackish water.
- * As a backing to marble and granite to prevent water ingress and thus eliminates surface staining.

Antique Master Coat-550 can be spray applied but should afterwards be brushed well into the substrate to ensure proper adhesion. To avoid this apply first coat by brush and second by spray application. Finally finish with sponge to get a uniform aesthetic appearance.

Coverage

Each square meter will require minimum of 0.9 Kg of mixed material per layer. The coverage rate for each layer will be strongly influenced by the roughness of the substrate. 1.8 kg / m² in two coats to achieve 1 mm thickness.

Packaging

Antique Master Coat-550 is available in 10kg powder & 5 Kg Liquid packs and in white and grey colours.



19

WATER PROOFING



Antique Water Guard - 1000

SILICONE BASED WATER REPELLENT IMPREGNATION

PRODUCT DETAILS

Antique Water guard is a concentrate of silicone micro-emulsion. When diluted with water, it becomes a water repellent impregnation with good penetration abilities.

Uses

As an impregnation for mineral substrates including concrete and cementitious rendering, natural and reconstructed stone, aerated concrete, brickwork (non vitrified brick), fibre cement, mineral paint coats etc. against driving rain and water ingress.

Appearance / Colour

Transparent liquid.

Chemical Base

Silicone micro-emulsion.

Mixing

1 part by weight of **Antique Water Guard** with 30 parts by weight of clean water. For other applications dilution down to 1 : 60 is feasible for dense substrate.

Application Method / Tools

Antique Water Guard is applied using low pressure spray, brush or roller, working from top to bottom taking care not to let the product run.

Apply subsequent coats "wet on wet".

Packing

1, 5kg



20



CLEANING PRODUCT



BEFORE



AFTER

Antique Tile Cleaner - Heavy Duty-225

TILE CARE - CLEANERS

PRODUCT DETAILS

A powerful, heavy duty, acid-based cleaner for ceramic & vitrified tile - wall & floor. The cleaner can be used as general purpose cleaner on other acid resistant surface.

BENEFITS

- Powerful formula
- Fast acting
- Easy to apply
- Removes cement film
- Remove efflorescence and most oxide stains

APPLICATION AREAS

- Interior & Exterior
- Wall & Floor

Note : Do not use on surface that are not resistant to acid such as Natural stones, Terrazzo and CP Fittings.

Packing

0.500ml



21

FLOOR FINISHING



Antique Cemtop - SLM

INTERIOR & EXTERIOR SELF - LEVELING MORTAR

PRODUCT DETAILS

Antique Cemtop - SLM is premix cement comprises of fluidity agent, sand, hardening catalyst and modified polymer use to improve bonding. Apply as a self - leveling mortar for interior use. It is easy to use just mix water. For apply concrete floors 3-7mm thickness is recommended.

Area of Application

For smooth and slim concrete surface Tile grout, ceramic tile, parquet flooring, laminate wood over concrete surface and for high standard carpeting.

Mixing

- Mix **Antique Cemtop - SLM** with water 5.5 -6 litres (22-24% of **Antique Cemtop - SLM**) with blender of speed 500 rpm
- Always add water first, follow by power
- Stir for about 3-5 minute until a lump free homogeneous mortar is form
- Don't add more water when after adding powder
- Apply mortar to adjusting surface within 15-20 minutes of mortar pot life

Packing

20 kg/Bag

Coverage

- 20 kg per 4 m² for 3mm thickness
- 1.6 kg per 1 m² for 1mm thickness
(Coverage rate may varies due to conditions)



22



WALL FINISHING



Antique Base Wall Mortar / Antique Finish Wall Mortar

NEW INNOVATION FOR WALL COATING IN INDIA

PRODUCT DETAILS

"Antique Wall Mortar" is a water resistant Luster wall coating for interior as well as exterior use. "Antique Wall Mortar" make building components totally water proof."Antique Wall Mortar" is totally crack proof with high bonding which gives colour resistancy as well as weather proofing. Get luster finish with UV resistance & eco friendly with high bond luster coating.

Salient features of "Antique Wall Mortar"

- *Make building component Totally Water
- *Made wall totally crackproof with high bonding.
- *Colour resistancy as well as Weatherproofing.
- *Use for interior as well as exterior coating.
- *Get Luster Finish With UV Resistance and Eco friendly "Antique Wall Mortar"

Coverage

The coverage area of "Antique Base Wall Mortar" on smooth normal mortar wall is 25 to 30 Sq. Ft/Kg/mm
The coverage area of "Antique Finish Wall Mortar" on smooth normal mortar wall is 35 to 40 Sq. Ft/Kg/mm
The coverage area, however, will depend upon the quality of the substrate.



Packing

"Antique Base Wall Mortar" is available in 20Kg Pack.
"Antique Finish Wall Mortar" is available in 10Kg Box Pack.

ACCESSORIES

Spacer

Spacer are available in 2, 3, 4, 5, 8, and 10mm Thickness
Packing : 1 Pouch 100 pcs.



Trowel



